

SADY®



Catalogue 2023



Power Tools
Safety/Protection



SADY®

power tools



safety/protection



POWER TOOLS



50
ANOS



D&S

IMPACT DRILLER - 18V 2.0Ah



BRUSHLESS
CORDLESS

Features	
Voltage	18V
Battery	Li-Ion 2.0 Ah
No load speed	0-2200 rpm
Maximum torque	180 Nm
Impact rate	0-3300 ipm
Chuck capacity	1/4" 6,35 mm
Weight	1110 gr.

Hexagonal chuck 6.35 mm. LED light.

Standard equipment:

18V 2.0Ah battery / charger / belt hook / plastic case

Code	Ref.		EAN
5116092	DS5254	18V 2.0Ah	4 5602482052543

IMPACT DRILLER - 18V 2.0Ah



CORDLESS

Features	
Voltage	12V
Battery	Li-Ion 1.5 Ah
Clutch positions	19+1
No load speed	0-350 / 0-1.200 rpm
Maximum torque	30 Nm
Weight	760 gramas

Robust and durable plastic housing. Quick-exchange bushing 10 mm. LED work light. Luminous indication of battery charge..

Drilling capacity: Wood: 20 mm / Metal: 8 mm

Standard equipment:

Battery 12V 1.5Ah / charger / 6 HSS drills / 6 spikes / magnetic spike holder / plastic ase

Code	Ref.		EAN
5116089	DS5255	12V - 1,5 Ah	4 5602482052550

DRILL 18V 2.0Ah



BRUSHLESS
CORDLESS

Features	
Voltage	18V
Battery	Li-Ion 2 Ah
Clutch positions	19 + 1
No load speed	1: 0-500 rpm 2: 0-1800rpm
Maximum torque	60 Nm
Weight	1250 gr.

Brushless motor that offers more power and autonomy. 19 torque positions for more control when screwdriving. Integrated LED light.

Drilling capacity

Wood: 40 mm / Metal: 13 mm

Standard equipment

18V 2.0Ah battery / Charger / Belt hook / Plastic case

Code	Ref.			EAN
5116096	DS5256	18V - 2.0 Ah	4	5602482052567

COMPACT SDS ROTARY HAMMER - 18V 4.0Ah



BRUSHLESS
CORDLESS

Features	
Voltage	18V
Battery	Li-Ion 4.0 Ah
Hammer power	1.7 J
SDS holder and 10mm plastic chuck	
No load speed	0-1400rpm
Impact rate	0-4500 ipm
Weight	2020 gr.

Brushless motor that provides greater power and autonomy. Push-button with 4 modes: drilling, tapping and chiselling, electronic speed regulation, LED light. SDS+ adaptor with quick-release plug.

Drilling capacity: Wood: 28 mm / Metal: 13 mm / Concrete: 22 mm

Standard equipment:

18V 4.0Ah battery / Charger / Side handle / Plastic case

Code	Ref.			EAN
5116100	DS5258	18V - 4.0 Ah	2	5602482052581

ORBITAL SANDER - 18V 2.0Ah



Features

Voltage	18V
Battery	Li-Ion 2.0 Ah
No load speed	10000 opm
Pad size	125 mm
Weight	1020 gr.

Compact design for greater control and convenience. Quick Velcro fastening of the sheets. Bag for dust extraction. Output for connection to hoovers.

Standard equipment:

18 V 2.0Ah battery / Charger / Plastic case

CORDLESS

Code	Ref.			EAN
5116099	DS5257	18V - 2.0 Ah	4	5602482052574

ANGLE GRINDER 125 MM - 18V 4.0Ah



Features

Voltage	18V
Battery	Li-Ion 4.0 Ah
No load speed	8500 rpm
Ø disc	125 mm
Spindler thread	M14
Weight	1535 gr.

High performance motor offering up to 8500 rpm. Ergonomic and compact design. Trigger lock for greater safety. 3-position side handle for greater control and comfort

Standard equipment:

18 V 2.0Ah battery / Wrench / Charger / 1 disc / Plastic case

BRUSHLESS
CORDLESS

Code	Ref.			EAN
5116108	DS5265	18V - 4.0 Ah	4	5602482052659

MULTI-FUNCTION TOOL - 18V 2.0Ah

MULTI-FUNCTION TOOLS
KIT 5 IN 1**18V**
Li-Ion 2.0Ah

CORDLESS

Code	Ref.			EAN
5116107	DS5264	5 in 1 18V - 2.0Ah	2	5602482052642
5116106	DS5422D	body (665 gramas)	1	5602482054226
5116101	DS5259D	drill head	1	5602482052598
5116102	DS5260D	multi function head	1	5602482052604
5116103	DS5261D	circular saw head	1	5602482052611
5116104	DS5262D	jig saw head	1	5602482052628
5116105	DS5263D	router head	1	5602482052635



Drill head	DS5259D
No load speed	0-350/1200 rpm
Impact power	0-18000 ipm
Max. torque	28 Nm



Multi function head	DS5260D
No load speed	16.000 rpm
Gears	2 mechanic



Circular saw head	DS5261D
No load speed	0-4.000 rpm
Disc	Ø85x15mm 20T



Jig saw head	DS5262D
No load speed	0-2.200 cpm
Stroke length	15 mm



Router head	DS5263D
No load speed	6.000 rpm
Milling cutter	6.35 mm

CIRCULAR SAW - 18v 4.0Ah


Features	
Voltage	18V
Battery	Li-Ion 4.0 Ah
No load speed	0-3650 rpm
Disc	Ø 185x16 mm
Max. cutting 90°	50 mm
Max. cutting 45°	35 mm
Bevel capacity	45°
Weight	2620 gr.

Saw with electronic brake with disc stop for greater safety. LED light to illuminate the cutting line. Output for Hoover connection. Keyless cutting depth adjustment. Maximum cutting capacity up to 65mm.

Standard equipment:
18 V 4.0Ah battery / Charger / Cutting disc / Plastic case.

BRUSHLESS
CORDLESS

REKORD

Code	Ref.			EAN
5116109	DS5266	18V - 4.0Ah	2	5602482052666
5118780	DS5623-24T	185x16x2,4 mm/24T	DISCO	5602482056237

JIG SAW - 18V 2.0Ah


Features	
Voltage	18V
Battery	Li-Ion 2.0 Ah
No load speed	0-3000 cpm
Stroke length	25 mm
Bevel capacity	45°
Weight	1820 gr.

Pendulum action with 3 pendulum settings for cutting various materials and applications. Variable speed. Tool-free blade change for greater speed and convenience. Bevel capacity up to 45° for angled cuts

Cutting capacity: Wood: 80 mm / Metal: 8 mm
Standard equipment:
18 V 2.0Ah battery / Charger / 2 saws / Wrench / Plastic case

BRUSHLESS
CORDLESS

Code	Ref.			EAN
5116110	DS5267	18V - 2.0Ah	4	5602482052673

LI-ION BATTERY - 12V 1.5 Ah

Lithium-ion technology provides optimum performance and uptime. No memory effect and virtually no automatic downloading. Maximum productivity and less downtime.

Code	Ref.			EAN
5116093	DS5268	carga: 60 min. 175 gr.	1	5602482052680

CHARGER 12V - 2.4A

Charges 12V Li-ion batteries with capacities of 1.5Ah. LED indicators of the charging process.

Code	Ref.			EAN
5116097	DS5271	12V - 2.4A	1	5602482052710

LI-ION BATTERY - 18V 2.0 Ah

Lithium-ion technology provides optimum performance and uptime. No memory effect and virtually no automatic downloading. Maximum productivity and less downtime.

Code	Ref.			EAN
5116094	DS5269	carga: 45 min. 400 gr.	1	5602482052697

LI-ION BATTERY - 18V

Lithium-ion technology provides optimum performance and uptime. No memory effect and virtually no automatic downloading. Maximum productivity and less downtime.

Código	Ref.			EAN
5116095	DS5270	4.0 Ah carga: 90 min.	1	5602482052703
5116407	DS5819	5.0 Ah carga: 120 min.	1	5602482058194

CHARGER 18V

Charges 18V Li-ion batteries with capacities of 2.0Ah and 4.0Ah. LED indicators of the charging process.

Código	Ref.			EAN
5116098	DS5272	2.4A	1	5602482052727
5116408	DS5820	3.5A RÁPIDO	1	5602482058200

DRILL 450W



Features	
Rated power	450W
No-load speed	0-3.200 rpm
Drill capacity	8 - 10 mm
Voltage	220V - 50Hz
Weight	1.300 kgs.

Drill capacity:
Wood: 20 mm / Metal: 10 mm

Code	Ref.			EAN
5116025	DS5281	450W	10	5602482052819

IMPACT DRILL 850W | 1 SPEED



Features	
Rated power	850W
No-load speed	0-2.800 rpm
Voltage	220V - 50Hz
Weight	2.500 kgs.

Drill capacity:
Wood: 20 mm / Metal: 10 mm / Concrete: 13 mm
Standard equipment:
Auxiliary handle

Code	Ref.			EAN
5114912	DS5116	850W	5	5602482051164

IMPACT DRILL 850W | 1 SPEED



Features	
Rated power	1050W
No-load speed	0-1.200 / 0-3.000 rpm
Voltage	220V - 50Hz
Weight	4.0 kgs.

Drill capacity:
Wood: 40 mm / Metal: 13 mm / Concrete: 16 mm
Standard equipment:
Auxiliary handle / Depth stop

Code	Ref.			EAN
5114913	DS5117	1.050W	5	5602482051171

ROTARY HAMMER SDS-PLUS 800W - 2.5 JOULES



Features

Rated power	800W
No-load speed	0-1050 rpm
Impact joules	2.5 Joules
Max. impact rates	5.200 ipm
Chuck	SDS PLUS
Weight	2.3 kg

Drilling capacity:

Wood: 30 mm / Metal: 13 mm / Concrete: 16 mm

Standard equipment:

Auxiliary handle / depth stop / 3 drills / 1 pointer / 1 chisel / plastic case



Code

5116085

Ref.

DS5289

800W



EAN

5602482052895

ROTARY HAMMER SDS-PLUS 1.300W - 5.5 JOULES



Features

Rated power	1.300W
No-load speed	0-850 rpm
Impact joules	5.5 Joules
Max. impact rates	4.200 ipm
Chuck	SDS PLUS
Weight	4.9 kg

Drilling capacity:

Wood: 40 mm / Metal: 13 mm / Concrete: 32 mm

Standard equipment:

Auxiliary handle / depth stop / 3 drills / 1 pointer / 1 chisel / plastic case



Code

5116084

Ref.

DS5290

1.300W



EAN

5602482052901

ROTARY HAMMER SDS-MAX 1.600W - 9 JOULES



Features

Rated power	1.600W
No-load speed	0-560 rpm
Impact joules	9 Joules
Max. impact rates	3.600 ipm
Chuck	SDS MAX
Weight	10 kg

Suitable for large drills, deep hole drilling or damage operations.

- Ergonomic handle.
- Unique 12 position chisel locking rotation system.
- High torque motor with dustproof design.

Drilling capacity:

Concrete: 40 mm

Standard equipment:

Auxiliary handle / 1 pointer / 1 drill / 1 tube of grease / plastic case



Code	Ref.			EAN
5117619	DS5625	1.600W	2	5602482056251

ROTARY HAMMER SDS-MAX 1.600W - 25 JOULES



Features

Rated power	1.600W
No-load speed	175-350 rpm
Impact joules	25 Joules
Max. impact rates	2.350 ipm
Chuck	SDS MAX
Weight	11.5 kg

Adequado para grandes brocas, furos profundos ou operações de danos. Sistema de rotação único de bloqueio do cinzel em 16 posições. Motor de alto torque: 6 modos de desaceleração para uma entrada de torque suave.

Capacidade de furação:

Betão: 50 mm


Standard equipment:

Auxiliary handle / 1 pointer / 1 drill / 1 tube of grease / plastic case



Code	Ref.			EAN
	DS5625	1.600W	1	5602482056268

DEMOLITION HAMMER SDS-MAX 1.300W - 15 JOULES

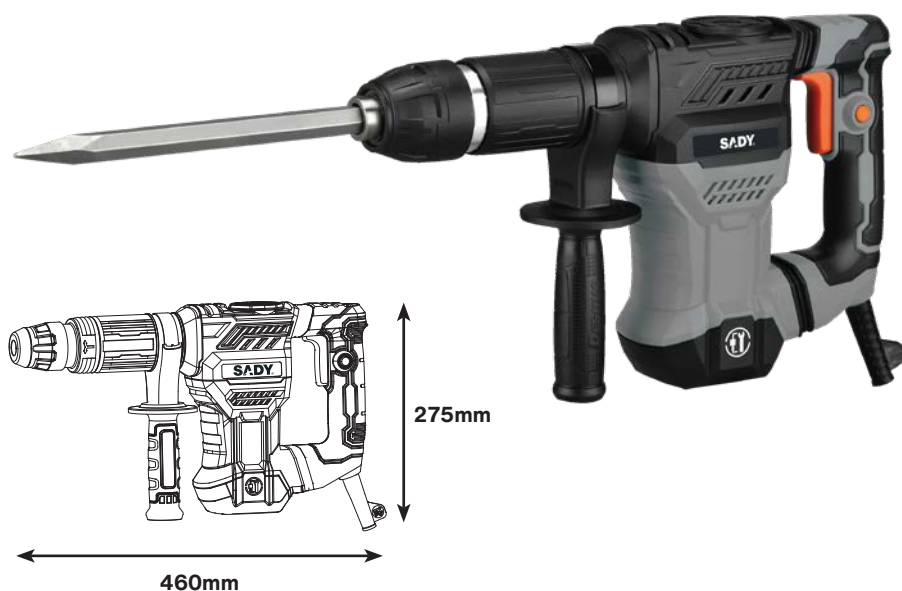

Features

Rated power	1.300 W
Impact joules	15 joules
No-load speed	3.900 ipm
Chuck	SDS MAX
Insulation class	II /
Weight	5.3 kg.


Ergonomic handle with locking switch, exclusive rotation system, swivelling auxiliary handle (360°), double anti-vibration frame.

Standard equipment:
Auxiliary handle / 1 pointer / 1 cinzel / 1 tube grease / plastic case



Code	Ref.		EAN
5116086	DS5291 1.300W	2	5602482052918

DEMOLITION HAMMER SDS-MAX 1.700W - 45 JOULES

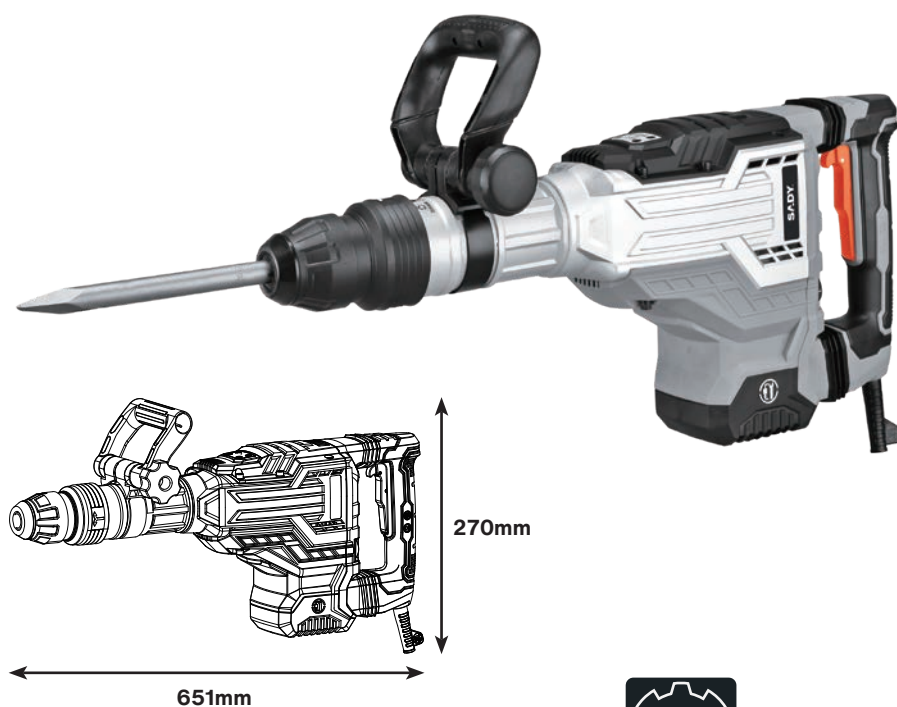

Features

Rated power	1.700 W
Impact joules	45 joules
No-load speed	2.2000 ipm
Chuck	SDS MAX
Insulation class	II /
Weight	11 kg.

Variable speed switch, swivelling auxiliary handle (360°), double anti-vibration frame.

Standard equipment:
Auxiliary handle / 1 pointer / 1 cinzel / 1 tube grease / plastic case



Code	Ref.		EAN
5116087	DS5292 1.700W	1	5602482052925

DETAIL SANDER 75W



Features	
Rated power	75W
No-load speed	11.000 rpm
Sanding pad size	113x93 mm
Sound pressure level	58 dB (A)
Vibrations	3.15 m/s ²
Weight	750 gr.

Code	Ref.			EAN
5115000	DS5179	75 watt	8	5602482051799

RANDOM ORBITAL SANDER 75W



Features	
Rated power	350W
No-load speed	13.000 rpm
Platten size	Ø 125 mm
N° of speed	5
Weight	1.7 kg.

Code	Ref.			EAN
5114999	DS5180	350 watt	4	5602482051805

LIXADORA VIBRATÓRIA - 150W



Features	
Rated power	150W
No-load speed	12.000 rpm
Platten size	90 x 187 mm
Weight	1.5 kg

Code	Ref.			EAN
5114998	DS181	150 watt	4	5602482051812

DRYWALL SANDER 820W



Features

Rated power	820W
Sandpaper diameter	225 mm
Long (with extension tube)	1,10 - 1.65 met.
No load speed	600-1.1800 rpm
LED light	10W (360°C)
Weight	4,000 kgs.

Ergonomic design with extendable arm up to 1.65 metres long to reach high areas. The switch protected against dust. Precise finishes thanks to the 360° LED light ring that shows surface irregularity. Soft start for greater control.

Standard equipment:

Dust extractor adapter /tube / sanding discs / plastic case.

Code	Ref.		EAN
5116136	DS5288	820 Watt	5602482052888

DRYWALL SANDER 750W



Features

Rated power	750W
Sandpaper diameter	180 mm
No load speed	1500-2700 rpm
LED light	10W (360°C)
Weight	2,400 kgs.

Ergonomic design with soft grip provides comfortable operation. Self-suction, with dust extraction system, no Hoover is needed, making the whole sanding operation extremely convenient. Sanding pad cover is adjustable. LED lighting of the sanding area

Standard equipment:

Dust extraction adapter /tube / sanding discs / plastic case

Code	Ref.		EAN
5116135	DS5287	750 Watt	5602482052871

ELECTRIC MIXER



Características		
Code	DS5282	DS5283
Rated power	1.200W	1.600W
No-load speed		
1ª velocidade	0~680 rpm	140~460 rpm
2ª velocidade		300~750 rpm
Mixture volume	80 litros	120 litros
Mixing padle	M14xØ120 mm	M14xØ140 mm
Weight (whit padle)	2,800 kgs.	3,550 kgs.

Electronic speed regulation, silent start, switch lock in ON position, whisk with M14 connection.

DS5282 - supplied in a cardboard box + 1 metallic beater
DS5283 - supplied in a plastic case + 1 metallic beater

Code	Ref.		EAN
5116133	DS5282	1200 Watt	5602482052826
5116134	DS5283	1600 Watt	5602482052833

MULTI TOOL 300W



Características	
Rated power	300W
No-load speed	15.000-22.000 rpm
Oscillation angle	3°
Weight	kgs.

Variable speed for different applications. Soft handle for better working and power indicator. Supplied with different accessories for sanding, cutting and sawing.



Code	Ref.		EAN
5116139	DS5284	300 Watt	5602482052840

HEAT GUN 2000W



Características

Rated power	2000W
Air flow	I: 300 lit./min. II: 500 lit./min
Temperature	I: 450°C II: 600°C
Peso	690 grs.

2000W heat gun with double protection to prolong the life of the gun.

Code	Ref.		EAN
5116141	DS5182	2000 Watt	5602482051829



HEAT GUN 2000W



Características

Rated power	2000W
Air flow	250/500 lit./min.
Temperature	I: 50°C II: 50-450°C III: 50-600°C
Peso	850 grs.

Semi professional heat gun with variable temperature and air flow regulator for continuous use. Double protection to prolong the life of the gun. Ergonomic handle with rubber cover for maximum comfort.



Code	Ref.		EAN
5116142	DS5183	2000 Watt	5602482051836



PLANER | 750W



Features

Rated power	1.050W
No-load speed	16.000 rpm
Cutting depth	0 - 3 mm
Size	82 mm
Chip thickness	0 - 3 mm
Weight	4.600 kgs.

1050W electric planer for optimum material removal. Depth control for more precise adjustment of cutting depth. Different bevel sizes through slots milled into the machine base

Code	Ref.			EAN
5114916	DS5118	82 mm 1.050W	4	5602482051188

ELECTRIC POLISHER 1200W - 180 MM



Características

Rated power	1200W
No-load speed	0-600/3.300 rpm
Pad size	150/180/230 mm
Spindle thread	M14
Weight	3,000 kg

Speed selector that allows the user to change the speed to perfectly suit the specific applications. Spindle lock for easy removal of the polishing nozzle.

Code	Ref.			EAN
5116137	DS5286	disco 180 mm		5602482052864

ELECTRONIC SOCKET WELDER 1500W



Características

Rated power	1500W
Temperature	0C° - 300°C
Heating spigots	Ø 20, 25, 32, 40,50, 63 mm
Weight	950 grs.

Electronic socket welder with temperature controller for plastic pipes and fittings designed to weld PE, PP, PB and PVDF pipes and fittings, both in the workshop and on site. Supplied with a metallic case for transport and storage.

Code	Ref.			EAN
5116138	DS5285	850 Watt		5602482052857

ANGLE GRINDER 750W | 115 MM



Features

Rated power	750W
No-load speed	11.000 rpm
Diameter	115 mm
Spindle thread	M14
Weight	2.200 kgs

Powerful 750W motor, provides up to 11,000 rpm. Three position side handle for additional control and safety. Restart protection. Quick and easy guard adjustment

Code

Ref.



EAN

5114909

DS5119

115 mm | 750W

6

5602482051195

ANGLE GRINDER 950W | 125 MM



Features

Rated power	950W
No-load speed	12.000 rpm
Diameter	125 mm
Spindle thread	M14
Weight	2.800 kgs.

Powerful 950W motor, provides up to 12,000 rpm. Three position side handle for additional control and safety. Restart protection. Quick and easy guard adjustment

Code

Ref.



EAN

5114910

DS5120

125 mm | 850W

6

5602482051201

ANGLE GRINDER 2350W | 230 MM



Features

Rated power	2.350W
No-load speed	6.300 rpm
Diameter	230 mm
Spindle thread	M14
Weight	6.400 kgs.

Powerful 2,350W motor delivers up to 6,300 rpm. Three position side handle for additional control and safety. Quick and easy disc replacement. Soft start.

Code

Ref.



EAN

5114949

DS5121

230 mm | 2.350W

2

5602482051218

CIRCULAR SAW | 1400W



Features	
Rated power	1.400W
No-load speed	5.500 rpm
Max cutting capacity 90°	65 mm
Max cutting capacity 45°	45 mm
Blade diameter	185 mm
Adjustable base plate	0-45°
Weight	5.000 kgs

1.400 W motor. Secondary handle for more comfortable, safe and precise use. Dust extraction enables easy vac attachment. Dust extraction enables easy vac attachment . Laser cutting guide.

Code	Ref.		2	5602482051225
5114917	DS5122	disco 185 mm		

SCIRCULAR SAW | 2000W

NEW



Features	
Rated power	2.000W
No-load speed	4.500 rpm
Max cutting capacity 90°	85 mm
Max cutting capacity 45°	56 mm
Blade diameter	235 mm
HOLE DIAMETRE	30 mm
Adjustable base plate	0-45°
Weight	5.000 kgs

Powerful 2000W, high efficiency motor delivers up to 4,500 rpm for demanding cuts. Bevel cutting up to 45° with keyless adjustment for angled cuts. Outlet for hoover connection. Cutting depth up to 85mm.

Code	Ref.			5602482057333
5116413	DS5733KC	disc 235x30 mm		

JIGSAW 710W



Features	
Rated power	710W
No-load speed	800 - 3.100 rpm
Stoke	19 mm
Bevel capacity	45°
Weight	2.400 kgs.

710W jigsaw with 4 cutting positions. Replacement of saw blades without tools. Adjustable pendulum action that gives greater cutting capacity and longer life for the saws. Adjustable base for bevel cutting.

Capacidade de corte:

Wood: 65 mm / Metal: 6 mm / Aluminum: 12 mm

Code	Ref.		EAN
5114914	DS5123	710W	5602482051232

JIG SAW 750W



Features	
Rated power	750W
No-load speed	1.000 - 3.000 rpm
Stoke	22 mm
Bevel capacity	45°
Weight	2.900 kgs.

750W jigsaw with 4 cutting positions. Replacement of saw blades without tools. Adjustable pendulum action that gives greater cutting capacity and longer life for the saws. Adjustable base for bevel cutting.

Cutting capacity:

Wood: 80 mm / Metal: 6 mm / Aluminum: 12 mm

Code	Ref.		EAN
5114915	DS5124	750W	5602482051249

TABLE SAW | 2200W



Features	
Rated power	2200W
Height adjustment	a 45° - 50 mm
	a 90° - 83 mm
Ø Saw blade	315 mm
No Load Speed	2800 rpm
Height of bench	850 mm
Size of bench	800 x 550 mm
Size of extended bench	800 x 400 mm
Sound pressure level	83,0 dB (A)
Sound power level	98,7 dB (A)
Weight	44 kg

Code	Ref.		EAN
5115001	DS2409	2200 watt	5602482024090

TILE CUTTER



Características	
Rated input	800W - 230~50Hz
Máx cut	at 45° - 37 mm
	at 90° - 43 mm
Diamond blade size	230 x 25,5 mm
Cutting length	900 mm
No load speed	2950 rpm
Table size	850 mm
Table	1170 x 394 mm
Vibration level	3,4 m/s ²
Sound pressure	LpA = 95 dB (A)
Sound power	LwA = 108 dB (A)
Weight	31 kg

Machine for cutting ceramic materials for amateur and professional use, for cutting tiles, brick, stone, marble, granite.

Code	Ref.		EAN
5116088	DS5278-TSW230	800 watt	5602482052789



ELECTRIC STAPLER/NAILER | 1050W



Features

Rated power	5 amp.
Rated firing speed	20 pc/min
Staples (T53)	6 a 14 mm
Nails (Type F)	15 mm
Weight	1.200 kgs.

ABS body with non-slip handle and metal rail. Works with type T53 staples and type F nails. Low profile actuator for ease of use. Safety button. Force selector, for working on various types of materials.



Code
5116140

Ref.
DS5184



EAN

5602482051843

DC INVERTAR MMA WELDER



Features		DS5434-160A	DS5435-180A
Voltage frequency	Volt 50-60Hz (AC)	1 Phx230	1 Phx230
Fuse	Amp.	13.1	13.1
Rated input power	kva	6.6	7.7
No-load voltage	Volt	65	65
Output current range	Amp.	10 - 140	5 - 160
Usable electrode	Ø mm	1,0 - 4,0	1,0 - 5,0
Duty cycle	%	20%	15%
Efficiency	%	85%	85%
Isolation class		F	
Protection class		IP21s	
Measurement	mm	360x230x320	
Weight	=Kg.	6.0	7.0

- IGBT technology, greatly improves the reliability of the machine.
- High duty cycle that increases welder efficiency and increases energy savings.
- Easy arc starting, low spatter.
- Stable welding current despite fluctuating input voltage.

Code

Ref.



EAN

5118837	DS5434-160A	160 Amp.	1	5602482054349
5118838	DS5435-180A	180 Amp.	1	5602482054356



MITER SAW | 1500W

NEW



Features

Rated power	1.500W - 230~50Hz
Height adjustment	a 45° - 35 mm a 90° - 70 mm
Ø Saw blade	216 x 30mm
No Load Speed	4500 rpm
Bevelled cut	0 - 45°
Sound pressure level	96,0 dB (A)
Sound power level	106 dB (A)
Weight	10 kg

Miter saw for cutting wood and similar materials, suitable for straight and curved cuts with miter angles up to 45°. up to 45°. Side mounted bevel control for quick and easy left or right bevel adjustments. Supplied with dust bag, cutting disc, spanner, wood clamp, extension bar.

Code	Ref.		EAN
5116440	DS5731ZP	1500 watt	1 5602482057319

TABLE SAW | 1800W

NEW





Features

Rated power	1.800W - 230~50Hz
Height adjustment	a 45° - 65 mm a 90° - 85 mm
Ø Saw blade	250 x 30 mm
Comprimento corte	900 mm
No Load Speed	5000 rpm
Size of bench	583 x 563 mm
Size of extended bench	583 x 165 mm
Bevelled cut	0 - 45°
Sound pressure level	LpA = 91 dB (A)
Sound power level	LwA = 104 dB (A)
Weight	22 kg

Table saw with 1800W power and maximum cutting capacity of 85mm. Handle to adjust the depth of cut. Suitable for cutting wood and similar materials and ideal for use on construction sites.


Code	Ref.		EAN
5116441	DS5732ZP	1800 watt	1 5602482057326

STAPLE (T53)

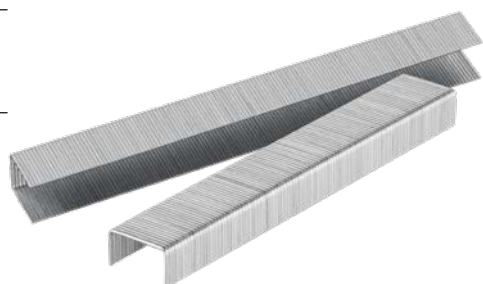

Code	Ref.		EAN
5116143	DS5185	6 mm (5000 unid.)	5602482051850
5116144	DS5186	8 mm (5000 unid.)	5602482051867
5116145	DS5187	10 mm (5000 unid.)	5602482051874
5116146	DS5188	12 mm (5000 unid.)	5602482051881

STAPLE (T53)

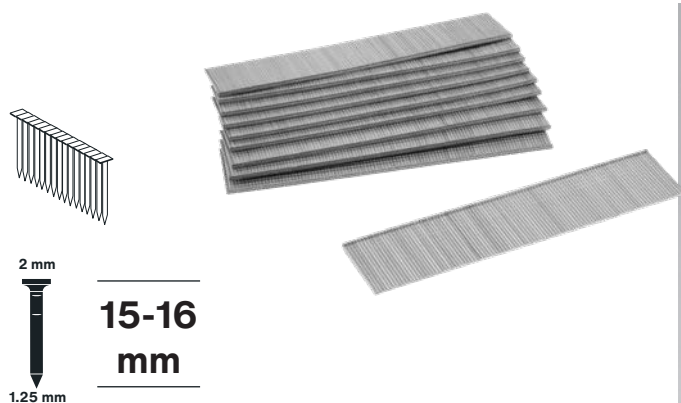

Code	Ref.		EAN
5116147	DS5189	15 mm (5000 unid.)	5602482051898

KEILESS HAND DRILL CHUCK



Code	Ref.		EAN
5116059	50100006	Ø 2-13 mm 1/2" x 20 UNF	5602482050556

HEATING SPIGOTS SOCKET WELDER



Code	Ref.		EAN
5118807		20 mm	5602482056657
5118808		25 mm	5602482056666
5118809		32 mm	5602482056671
5115510		40 mm	5602482056688
5118811		50 mm	5602482056698
5118812		63 mm	5602482056701

DISCO LIXA BRANCA COM VELCRO (8 HOLES)



For drywall sander SADY DS5287 (750watt)

Código	Ref.		EAN
5118864	DS5860-8F	Ø 180 mm Grit 80	5602482058606
5118857	DS5861-8F	Ø 180 mm Grit 100	5602482058613
5118858	DS5862-8F	Ø 180 mm Grit 120	5602482058620
5118859	DS5863-8F	Ø 180 mm Grit 150	5602482058637
5118860	DS5864-8F	Ø 180 mm Grit 180	5602482058644
5118870	DS5865-8F	Ø 180 mm Grit 220	5602482058651

DISCO LIXA BRANCA COM VELCRO (6 HOLES)




For drywall sander SADY DS5288 (820watt)

Código	Ref.	EAN
5118865	DS5866-8F	Ø 225 mm Grit 80
5118866	DS5867-8F	Ø 225 mm Grit 100
5118861	DS5868-8F	Ø 225 mm Grit 120
5118862	DS5869-8F	Ø 225 mm Grit 150
5118863	DS5870-8F	Ø 225 mm Grit 180
5118871	DS5871-8F	Ø 225 mm Grit 220

SANDING DISC FOR DRYWALL SANDER

Grit

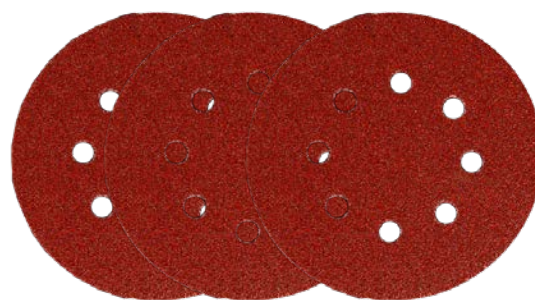60
80
120
150
180
240

For drywall sander SADY DS5288 (820watt)

Code	Ref.	EAN
5118814	Ø 230 mm 6 pcs	5602482056640

TRIANGLE SANDING PAPER




For oscillating multitool SADY DS5284 (300watt)

Code	Ref.	EAN
5118813	Grit 60	5602482056526
5118818	Grit 80	5602482056633

TRIANGLE SANDING PAPER | DETAIL SANDER

Triangular sandpaper

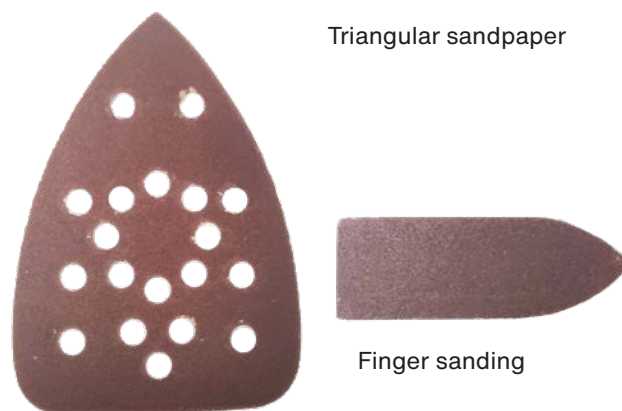

Code	Ref.	EAN
5118842	DS5608 Grit 60	5602482056084
5118843	DS5609 Grit 80	5602482056091
5118844	DS5610 Grit 120	5602482056107
5118841	DS5611 Grit 80 finger sanding	5602482056114

JIG SAW BLADES | FOR WOOD



DS5616F (DOWN CUT)



Compatible with machines

SADY

BOSCH | AEG | MAKITA
BLACK & DECKER
HITACHI | DEWALT
POWER BASE | RYOBI
METABO | McKELLER
STANLEY FATMAX

Carbon steel (HSC) T-shank saws for use on soft materials such as wood, pressed wood and plastics.

NEW

Code	Ref.			EAN
5115030	DS5612G	75 x 8 x 1,2 mm corte: 30-45 mm nº dentes pol.: 6	5	5602482056121
5115031	DS5613F	75 x 8 x 1,2 mm corte: 30-45 mm nº dentes pol.: 6	5	5602482056138
5115032	DS5614M	75 x 8 x 1,2 mm corte: 30-45 mm nº dentes pol.: 8	5	5602482056145
5115033	DS5615F	75 x 8 x 1,45 mm corte: 6-30 mm nº dentes pol.: 10 corte frontal	5	5602482056152
5115034	DS5616F	75 x 8 x 1,45 mm corte: 6-30 mm nº dentes pol.: 10	5	5602482056169
5115035	DS5617G	100 x 8 x 1,2 mm corte: 45-60 mm nº dentes pol.: 6	5	5602482056176

JIG SAW BLADES | FOR METAL



High speed steel (HSS) saws are suitable for working with harder materials, such as metal, copper, aluminium and other non-ferrous metals. The qualities of HSS mean that they are generally stronger and have greater abrasive resistance by cutting faster and have a longer life.

Code	Ref.			EAN
5115036	DS5618G	50 x 8 x 1,0 mm corte: 2,5-6,0 mm nº dentes pol.: 12	5	5602482056183
5115037	DS5619F	50 x 8 x 1,2 mm corte: 1,0-3,0 mm nº dentes pol.: 21	5	5602482056190
5115037	DS5620F	75 x 9,5 x 1,0 mm corte: 1,5-2,0 mm nº dentes pol.: 10-21	5	5602482056206



HIGH PRESSURE CLEANER - AQUA 140


Features	
Pressure	95 bar
Operat. pressure/max	140 bar
Delivery rate	360 lit./hora
Absorbed power	2000 W
Max. pressure input	10 bar
Min. pressure input	1,5 bar
Washing level	+ 60-80 m ²
Max. water inlet temperature	40°C
Sound pressure level (LwA)	90 dB
Weight	13,5 kg

AQUA is a mini range studied for the most demanding customers. Compact and easy to move like entry level products, they hide two powerful induction motors (from 2000 to 2200 Watt) suitable for frequent use and tough cleaning tasks.


brushless

Code	Ref.		EAN
5116022	AQUA 140 140 bar	1	5602482051126

HIGH PRESSURE CLEANER - AQUA 160 PLUS


Features	
Pressure	110 bar
Operat. pressure/max	160 bar
Delivery rate	390 lit./hora
Absorbed power	2200 W
Max. pressure input	10 bar
Min. pressure input	1,5 bar
Washing level	+ >100 m ²
Max. water inlet temperature	40°C
Sound pressure level (LwA)	90 dB
Weight	14,5 kg

AQUA is a mini range studied for the most demanding customers. Compact and easy to move like entry level products, they hide two powerful induction motors (from 2000 to 2200 Watt) suitable for frequent use and tough cleaning tasks..


brushless

Code	Ref.		EAN
5116023	AQUA 160 160 bar	1	5602482051133

HIGH PRESSURE CLEANER - AQUA 200 EXTREME



Features

Pressure	150 bar
Operat. pressure/max	200 bar
Delivery rate	300 lit./hora
Absorbed power	2300 W
Max. pressure input	10 bar
Min. pressure input	1,5 bar
Washing level	+ >100 m ²
Max. water inlet temperature	40°C
Sound pressure level (LwA)	90 dB
Weight	14,5 kg

AQUA is a mini range studied for the most demanding customers. Compact and easy to move like entry level products, they hide two powerful induction motors (from 2000 to 2200 Watt) suitable for frequent use and tough cleaning tasks..



brushless

Code	Ref.		EAN
5116024	AQUA 200 200 bar	1	5602482051140

ASPIRADOR DE CINZAS




Features

Absorbed power	máx. 1000 W
Column depression	16 kPa
Delivery rate	30 lit./seg.
Tank capacity	18 litros
Sound pressure level (LwA)	80dB
Weight	3 kg

- Material: Metal
 - Suction tube diameter: 32mm
 - Washable HEPA filter
 - Blower function
- Caution not to suck hot ashes, glowing embers and liquids

Code	Ref.		EAN
5116202	DS5735-BL 1000 W	1	5602482057357

S6.002.0322	LANCE		
Image	Code	Cód. EAN	For machines
	5114996	5602482054233	AQUA 200

S6.002.0361	LANCE		
Image	Code	Cód. EAN	For machines
	5114991	5602482054240	AQUA 140 AQUA 160

S4.018.0095	8m HIGH PRESSURE HOSE		
Image	Code	Cód. EAN	For machines
	5114992	5602482054257	AQUA 140

S4.018.0102	8m HIGH PRESSURE HOSE		
Image	Code	Cód. EAN	For machines
	511493	5602482054264	AQUA 160

S4.018.0138	8m HIGH PRESSURE HOSE		
Image	Code	Cód. EAN	For machines
	5114995	5602482054271	AQUA 200

S6.001.0116	GUN M22		
Image	Code	Cód. EAN	For machines
	5114994	5602482054288	AQUA 200

S6.001.0076	GUN		
Image	Code	Cód. EAN	For machines
	5114990	5602482054295	AQUA 140 AQUA 160

S6.002.0637	HIGH PRESSURE NOZZLE		
Image	Code	Cód. EAN	For machines
	3005455		AQUA 140 AQUA 160

S6.002.0346	HIGH PRESSURE ROTOX NOZZLE		
Image	Code	Cód. EAN	For machines
	3005454		AQUA 140 AQUA 160

S3.714.0019	HIGH PRESSURE ROTOX NOZZLE		
Image	Code	Cód. EAN	For machines
	3005457		AQUA 200

S3.005.5452	KIT NOZZLE		
Image	Code	Cód. EAN	For machines
	3005452		AQUA 200



SILENT AIR COMPRESSOR | 6 liters



Features	DS5250-OLF06
Power	1 HP
Tank volume	6 lit.
Voltage/Frequency	230 V-50Hz
Speed	1.4500 rpm
Suction rate	128 lit./min.
Operating pressure	8 bar
Máx. pressure	12 bar
Sound power level	≤ 78 dB
Protection type	IP20
Weight	15 kgs

High-quality and oil-free unit with engine protection and tarnish relief. Portable: easy transport, and the vibration-damping base ensures quiet work.

Code	Ref.		EAN
5116031	DS5250-OLF06	1,5HP 6 lit.	5602482052505

SILENT AIR COMPRESSOR | 6 liters



Features	DS5251-OLF24	DS5252-OLF50
Power	1 HP	1 HP
Tank volume	24 lit.	50 lit.
Voltage/Frequency	230 V-50Hz	230 V-50Hz
Speed	1.4500 rpm	1.4500 rpm
Suction rate	128 lit./min.	128 lit./min.
Operating pressure	8 bar	8 bar
Máx. pressure	12 bar	12 bar
Sound power level	≤ 78 dB	≤ 78 dB
Protection type	IP20	IP20
Weight	21 kgs	28 kgs

High-quality and oil-free unit with engine protection and tarnish relief. Variable: the whisper compressor is suitable for clamping devices, silicone. spot repair, painting work as well as for filling car and bicycle tires and balls.

Code	Ref.		EAN
5116032	DS5251-OLF24	1,5 HP 24 lit.	5602482052512
5116033	DS5252-OLF50	1,5 HP 50 lit.	5602482052522

OIL-LUBRICATED AIR COMPRESSOR | 6 liters



Features	DS5245-EZ06
Power	1,5 HP
Tank volume	6 litros
Absorbed power	1.100W
Voltage/Frequency	230 V-50Hz
Speed	2.850 rpm
Suction rate	165 lit./min.
Operating pressure	8 bar
Máx. pressure	12 bar
Ø piston	Ø 48 mm
Sound power level	≤ 97 dB
Protection type	IP20
Weight	15 kgs

Oil lubricated pump for reliable performance. Max. Pressure: 12 bar.
Motor thermal protection

Code	Ref.		EAN
5116026	DS5245-EZ06	1,5HP 6 litros	5602482052451

OIL-LUBRICATED AIR COMPRESSOR | 24/50 liters



Features	DS5246-EZ25	DS5247-EZ50
Power	1,5 HP	1,5 HP
Tank volume	24 lit.	50 lit.
Absorbed power	1.100W	1.100W
Voltage/Frequency	230 V-50Hz	
Speed	2.850 rpm	
Suction rate	165 lit./min.	165 lit./min.
Operating pressure	8 bar	8 bar
Máx. pressure	12 bar	12 bar
Ø piston	Ø 48 mm	Ø 48 mm
Sound power level	IP20	
Protection type	21 kgs.	27 kgs

Oil lubricated pump for reliable performance. Max. Pressure: 12 bar.
Motor thermal protection

Code	Ref.		EAN
5116027	DS5246-EZ25	1,5 HP 24 lit.	5602482052468
5116028	DS5247-EZ50	1,5 HP 50 lit.	5602482052475

BELT DRIVEN AIR COMPRESSOR | 90 liters


Features	DS5248-EZ100
Power	2 HP
Tank volume	90 litros
Absorbed power	3.000W
Voltage/Frequency	230 V-50Hz
Speed	920 rpm
Suction rate	354 lit./min.
Operating pressure	10 bar
Máx. pressure	15 bar
Ø piston	Ø 65 mm (x2)
Sound power level	≤ 97 dB
Protection type	IP20
Weight	67 kgs

Oil-free belt driven ensures low maintenance and reliable performance. Max. Pressure: 10 bar. V-Twin unit with 3000W motor

Code	Ref.		EAN
5116029	DS5248-EZ100	2HP 90 lit.	1 5602482052482

BELT DRIVEN AIR COMPRESSOR | 90 liters


Features	DS5249-EZ200
Power	3 HP
Tank volume	200 litros
Absorbed power	3.000W
Voltage/Frequency	230 V-50Hz
Speed	2.850 rpm
Suction rate	354 litros/min.
Operating pressure	10 bar
Máx. pressure	15 bar
Ø piston	Ø 65 mm (x2)
Sound power level	≤ 97 dB
Protection type	IP20
Weight	105 kgs

Oil-free belt driven ensures low maintenance and reliable performance. Max. Pressure: 10 bar. V-Twin unit with 3000W motor

Code	Ref.		EAN
5116030	DS5249-EZ200	3 HP 200 litros	1 5602482052499

BENCH GRINDER

Features	DG3212F	DG3215F	DS3220F
Supply	230V~50 Hz	230V~50 Hz	230V~50 Hz
Size	125 mm	150 mm	200 mm
Power	150W	250W	370W
Motor	0,2 HP	0,33 HP	0,5 HP
Revolutions	S ₂ 30 min./2.950 min. ⁻¹	S ₂ 30 min./2.950 min. ⁻¹	S ₂ 30 min./2.950 min. ⁻¹
Speed	19,3 m/sec	23,5 m/sec	30,9 m/sec
Grinding wheels	125 x 16 x 12,7 mm	150 x 20 x 12,7 mm	200 x 20 x 16 mm
Weight	5,00 kg	7,500 kg	10,500 kg



Code	Ref.			EAN
5106639	DG3212F	125 mm 5"	1	5602482003985
5106640	DG3215F	150 mm 6"	1	5602482010710
5106641	DG3220F	200 mm 8"	1	5602482010689


ELECTRIC HOIST



Features	DS0514 YT120/250	DS0759 YT200/400	DS0878 YT300/600
Supply	230V~50 Hz	230V~50 Hz	230V~50 Hz
Motor	500W	1.000W	1.050W
Chain	2,4 A	4,35 A	4,6 A
Tensile strength	1.870 N/mm ²	1.870 N/mm ²	1.870 N/mm ²
Steel cable diameter	Ø 3 mm	Ø 4 mm	Ø 4,5 mm
Max. loading capacity			
- single line	125 kg	200 kg	300 kg
- double line	250 kg	400 kg	600 kg
Lifting speed			
- single line	8 m/min.	8 m/min.	8 m/min.
- double line	4 m/min.	4 m/min.	4 m/min.
Lifting height			
- single line	18 metres	18 metres	18 metres
- double line	9 metres	9 metres	9 metres
Weight	11,5 kgs	18 kg	19 kg

Code	Ref.		Code	Ref.	Code	Ref.	Code	Ref.
5108451	DS0514-YT125/250	125 250 kg	1	5602482005143				
5108452	DS0759YT200/400	200 400 kg	1	5602482007598				
5108453	DS0878-YT300/600	300 600 kg	1	560248208786				

HOIST SUPPORT ARM

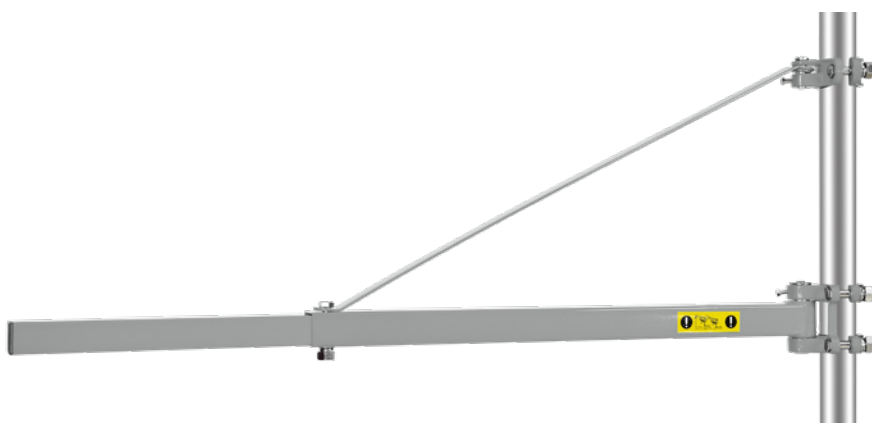

Features
Maximum load capacity
up to 750 mm - 600 kg
up to 1100 mm - 250 kg

Code	Ref.		Code	Ref.	Code	Ref.	Code	Ref.
5108454	HST250/1000		1	5602482021105				

STANDING PILLAR DRILL



Features

Motor power	1/3 CH
Drilling depth	0,8 - 13 mm
Chuck	13 mm
Shank diameter	40 mm
Spindle taper	JT33
Working speeds	(5) 620 - 2620 rpm
Table travel	203 mm
Distance spindle to column	129 mm
Spindle travel	50 mm
Column diameter	48 mm
Table size	165 x 164 mm
Base size	280 x 180 mm
Height	580 mm
Weight	19 kg

Standing pillar drill with 5 working speeds and 13 mm chuck. Perfect for DIY and small-scale works. Table with elevation and tilt adjustment from 0 to 45° on either side.

Code	Ref.			EAN
5108492	ZJ4113	13 mm single-phase	1	5602482024281

STANDING PILLAR DRILL



Features

Motor power	1/2CV
Drilling depth	3 - 16 mm
Chuck	16 mm
Shank diameter	55 mm
Spindle taper	MT2
Working speeds	(12) 180 - 2740 rpm
Table travel	330 mm
Distance spindle to column	130 mm
Spindle travel	80 mm
Column diameter	73 mm
Table size	254 x 254 mm
Base size	456 x 280 mm
Height	990 mm
Weight	55 kgs.

Professional standing pillar drill with 12 working speeds and 16 mm chuck. Perfect for workshops. Equipped with a 1 HP engine that gives it great efficiency for all types of work. Comes with a table with tilt adjustment on either side.

Code	Ref.			EAN
5108493		16 mm monofásica	1	5602482015968

CHUCK FOR PILLAR DRILL



Code	Ref.			EAN
5108497		16 mm		
5108498		20 mm		

SINGLE-PHASE GENERATOR 2.200W


Features	
AC maximum power	2.5 kW
Output	±12 V - 8.3 amp
Voltage	220-240 volt / 50 Hz
Amperage	12 amp
Battery	Li-on 12V - 0,8Ah
Noise index @7m	68 dB (A)
Power factor	1.0
Motor	163 cc - 5.5 HP
Fuel tank capacity	15 litres
Fuel	unleaded petrol
Dimensions (LxWxH)	710 x 460 x 460 mm
Weight	52,3 kg

Generator with a 4-stroke engine, 1 cylinder. OHV, air-cooled. Recoil and electric start.

Code	Ref.		EAN
5114489	RD2910EX	2.200W	5602482048393

SINGLE-PHASE GENERATOR 2.800W


Features	
AC maximum power	2.8 kW
Output	±12 V - 8.3 amp
Voltage	220-240 volt / 50 Hz
Amperage	13 amp
Battery	Li-on 12V - 0,8Ah
Noise index @7m	68 dB (A)
Power factor	1.0
Motor	196 cc - 6.5 HP
Fuel tank capacity	15 litres
Fuel	unleaded petrol
Dimensions (LxWxH)	710 x 460 x 460 mm
Weight	57 kg

Generator with a 4-stroke engine, 1 cylinder. OHV, air-cooled. Recoil and electric start.

Code	Ref.		EAN
5114485	RD3910EX	2.800W	5602482048409

SINGLE-PHASE GENERATOR 3.100W



Features

AC maximum power	3.1 kW
Output	±12 V - 8.3 amp
Voltage	220-240 volt / 50 Hz
Amperage	14 amp
Battery	Li-on 12V - 1,6Ah
Noise index @7m	69 dB (A)
Power factor	1.0
Motor	270 cc - 9 HP
Fuel tank capacity	25 litres
Fuel	unleaded petrol
Dimensions (LxWxH)	810 x 560 x 575 mm
Weight	79 kg

Generator with a 4-stroke engine, 1 cylinder. OHV, air-cooled. Recoil and electric start.

Code	Ref.		1	EAN
5114486	RD5910EX	3.100W		5602482048416

SINGLE-PHASE GENERATOR 5.500W



Features

AC maximum power	5.5 kW
Output	±12 V - 8.3 amp
Voltage	220-240 volt / 50 Hz
Amperage	25 amp
Battery	Li-on 12V - 1,6Ah
Noise index @7m	72 dB (A)
Power factor	1.0
Motor	389 cc - 13 HP
Fuel tank capacity	25 litres
Fuel	unleaded petrol
Dimensions (LxWxH)	710 x 460 x 460 mm
Weight	94 kg

Generator with a 4-stroke engine, 1 cylinder. OHV, air-cooled. Recoil and electric start.

Code	Ref.		1	EAN
5114487	RD7910EX	5.500W		5602482048423

SINGLE-PHASE GENERATOR 7.000W


Features	
AC maximum power	7.0 kW
Output	±12 V - 8.3 amp
Voltage	220-240 volt / 50 Hz
Amperage	31 amp
Battery	Li-on 12V - 1,6Ah
Noise index @7m	72 dB (A)
Power factor	1.0
Motor	439 cc - 15 HP
Fuel tank capacity	25 litres
Fuel	unleaded petrol
Dimensions (LxWxH)	810 x 560 x 575 mm
Weight	102 kg

Generator with a 4-stroke engine, 1 cylinder. OHV, air-cooled. Recoil and electric start.

Code	Ref.		EAN
5114488	RD9910EX	7.000W	5602482048430

SINGLE-PHASE GENERATOR 8.300W


Features	
AC maximum power	8.3 kW
Output	±12 V - 8.3 amp
Voltage	220-240 volt / 50 Hz
Amperage	37 amp
Battery	Li-on 12V - 1,6Ah
Noise index @7m	72 dB (A)
Power factor	1.0
Motor	459 cc - 17 HP
Fuel tank capacity	25 litres
Fuel	unleaded petrol
Dimensions (LxWxH)	810 x 560 x 575 mm
Weight	108 kg

Generator with a 4-stroke engine, 1 cylinder. OHV, air-cooled. Recoil and electric start.

Code	Ref.		EAN
5114489	RD10910EX	8.000W	5602482048447

SINGLE-PHASE GENERATOR - DUAL FUEL



Features	RD3910EL	RD8910EL
AC maximum power	essence - 3.3 Kw gaz propane 2.6 KwA	essence - 7.6 Kw gaz propane 7.0 KwA
Voltage	220-240 volt / 50 Hz	220-240 volt / 50 Hz
Amperage	11,3 A	26,5 A
Noise index @7m	71 dB (A)	89 dB (A)
Revolutions	3.000 rpm	3.000 rpm
Motor	208 cc -	439 cc - 15 HP
Petrol tank	23 litres	36 litres
Oil tank	0.6 litres	1,1 litres
Petrol consumption (25%; 50%; 75%)	0.8 l/h.- 1 l/h; 1.2 l/h	1,5 l/h; 2 l/h; 2,6 l/h
Gas consumption (25%; 50%; 75%)	0.5 k/h – 0.65 k/h; 0.8 k/h	0,91 k/h; 1,52 k/h; 1,84 k/h
Dimensions (LxWxH)	660 x 460 x 490	760 x 560 x 590 mm
Weight	54 kg	96 kg

Generator with an OHV air-cooled engine, 4-stroke, 1 cylinder.
Recoil and electric start.
Fuel: Petrol or propane gas

Code	Ref.		EAN
5114889	RD3910EL	3.300W 2.600W	5602482052802
5114604	RD8910EL	7.600W 7.000W	5602482048454

DIESEL GENERATOR 5.500W



Features	
AC maximum power	5.5 Kw
Output	±12 V - 8.3 A
Voltage	220-240 volt / 50 Hz
Noise index (LwA)	93 dB (A)
Power factor	1.0
Classe protection	IP23
RPM	3.000 rpm
Motor	456 cc
Start	eléctrico
Fuel tank capacity	13,5 litros
Oil tank capacity	1,65 litros
Fuel	gasóleo
Dimensions (LxWxH)	950 x 550 x 740 mm
Weight	148 kg

Silent generator with air-cooled 4-stroke diesel engine, electric start,
direct injection and current cut-off.
Use oil suitable for diesel engines

Code	Ref.		EAN
5114890	SDG7000SE	5.500W	5602482048461

SAFETY/PROTECTION



LEATHER GLOVES



EN 388
3143X

STANDARD: EN388

- Material: Cow leather.
- Highly pliable gloves.
- Mechanical hazards resistant.

Code	Ref.			EAN
5511501	D14Y/4T 9"		12-120	5602482000865
5511464	D-14Y/4T 10"		12-120	5602482047709

LEATHER GLOVES



EN 388
3143X

STANDARD: EN388

- Material: Cow leather.
- For maintenance work and object handling.
- Mechanical hazards resistant.

Code	Ref.			EAN
5511398	D14W/4T 8"		12-120	5602482046825
5501340	D14W/4T 9"		12-120	5602482037649
5504932	D14W/4T 10"		12-120	5602482004993

WORK GLOVES



STANDARD: EN420

- Material: Suede cowhide leather/ white cotton.
- Extra palm, forefinger and thumb protection.
- For maintenance work and object handling.
- Mechanical hazards resistant.

Code	Ref.			EAN
5500523	CS303R/W 10,5"		12-120	5602482021150

WELDING GLOVES



STANDARD: EN420

- Material: Suede cowhide leather.
- For welding applications and handling of hot components.
- Mechanical hazards resistant.

Code	Ref.			EAN
5500522	WC004/GRN 14"		 6-72	5602482021679

CANADIAN RIGGER GLOVES



STANDARD: EN420

- Material: Suede pig leather/ cotton.
- For loading and unloading goods, general tasks.
- Mechanical hazards resistant.

Code	Ref.			EAN
5511133	88PBSA 10,5"		 12-120	5602482044913

HEAVY-DUTY WORK GLOVES



EN388 - EN420

- Material: Rubber / PVC / 13G Polyester.
- Rubber palm, padded fingers and PVC back.
- 13G polyester lining. Velcro wrist strap closure.
- To operate machines, construction work, ...

Code	Ref.			EAN
5511138	0390(X502) 9"		 12-60	5602482044920
5511139	0390(X502) 10"		 12-60	5602482044937

CUT RESISTANT GLOVES



STANDARD: EN420

- Material: Latex, cotton lining and wrist.
- Mechanical hazards resistant.

Code	Ref.			EAN
5500426	R181W 10,5"		12-120	5602482000650

LATEX PALM GLOVES



STANDARD: EN 388 - EN420

- Material: Granulated rubber, cotton lining and wrist.
- Top dexterity gloves, high grip.
- Mechanical hazards resistant.

Code	Ref.			EAN
5511408	R281B 7"		12-120	5602482046795
5501284	R281B 8"		12-120	5602482031401
5511285	R281B 9"		12-120	5602482031418
5511409	R281B 10"		12-120	5602482046801

LATEX GLOVES



STANDARD: EN388

- Material: Latex, nylon lining and wrist.
- Top dexterity gloves, high grip.
- Mechanical hazards resistant.

Code	Ref.			EAN
5510912	R300 7"		12-120	5602482040946
5505056	R300 8"		12-120	5602482037656
5505057	R300 9"		12-120	5602482037663
5505058	R300 10"		12-120	5602482037670

NITRILE COATED GLOVES (GREY)



EN 388

 4121X

STANDARD: EN420

- Material: Nitrile, nylon lining and wrist.
- Top dexterity gloves, high grip.
- Mechanical hazards resistant.

Code	Ref.			EAN
5511051	N119 6"		12-120	5602482044234
5501282	N119 7"		12-120	5602482031425
5501283	N119 8"		12-120	5602482031432
5504929	N119 9"		12-120	5602482003835
5504930	N119 10"		12-120	560248204149
5504931	N119 11"		12-120	5602482004887

NITRILE COATED GLOVES (FLUORESCENT YELLOW)



EN 388

 4121X

STANDARD: EN388 - EN420

- Material: Nitrile, nylon lining and wrist.
- Top dexterity gloves, high grip.
- Mechanical hazards resistant.

Code	Ref.			EAN
5511134	N117 7"		12-120	5602482044876
5511135	N117 8"		12-120	5602482044883
5511136	N117 9"		12-120	5602482044890
5511137	N117 10"		12-120	5602482044906

PU COATED GLOVES | GREY



EN 388

 3131X

STANDARD: EN388/EN420

- Material: PU, nylon lining and wrist.
- These gloves are suited to work where a high level of dexterity is needed (electronics, ...) along with a good protection factor.
- Mechanical hazards resistant.

Code	Ref.			EAN
5511410	NL186 GRIS 7"		12-120	5602482046832
5511411	NL186 GRIS 8"		12-120	5602482046849
5511412	NL186 GRIS 9"		12-120	5602482046856
5511413	NL186 GRIS 10"		12-120	5602482046863

NITRILE COATED GLOVES (BLUE)



EN 388

4111X

STANDARD: EN388 - EN420

- Material: Nitrile, nylon lining and wrist.
- Top dexterity gloves, high grip.
- Mechanical hazards resistant.

Code	Ref.			EAN
5501015	N52 9"		12-120	5602482003620
5500637	N52 10"		12-120	5602482021662

PVC GLOVES (RED)



EN 388

4121X

STANDARD: EN388 - EN420

- Material: Red PVC.
- For protection against diluted detergent solutions, grease, oil, petrol, ...
- Suitable for cleaning jobs.

Code	Ref.			EAN
5500427	PV91-27 27 cm		12-120	5602482000889
5500428	1175 35 cm		12-60	5602482000872

LATEX GLOVES (BLACK)



STANDARD: EN420

- Material: Latex.
- Non-slip grooves on the palm and fingers.
- Waterproof.

Code	Ref.			EAN
5500812	R101 M		12-120	5602482010512
5500813	R101 L		12-120	5602482000858
5501814	R101 XL		12-120	

GARDENING GLOVES



- Material: 100% cotton.
- Non-slip coating on the palm and fingers.
- Elastic on the back.

Code	Ref.		EAN
5500521	2102	12-300	5602482011168

WELDING APRON



Code	Ref.		EAN
5112690	leather		5602482043268

WORK LINE

WORKING JACKET - GREY/ORANJE



Practical and versatile jacket made with soft fabrics. To be used in the most varied types of work.

Protective clothing against minor hazards only.

- Zip closure with protective fabric and velcro closure
- Velcro-adjustable cuffs
- Multiple pockets with flap and velcro closure.
- Washable
- Pre-shrunk

Fabric: 65% polyester, 35% cotton

Code	Ref.		EAN
5511541	WK300J M		5602482048270
5511542	WK300J L		5602482048287
5511543	WK300J XL		5602482048294
5511544	WK300J XXL		5602482048300

WORKING PANTS - GREY/ORANJE



Pants for the most varied purposes made with soft fabrics.

Protective clothing against minor hazards only.

- Button and zip
- Elastic waistband with button
- Left leg pocket with flap and velcro closure
- Two back pockets with flap and velcro closure.
- knee pads
- Washable
- Pre-shrunk

Fabric: 65% polyester, 35% cotton

Code	Ref.		EAN
5511545	WK300P M		5602482048317
5511546	WK300P L		5602482048324
5511547	WK300P XL		5602482048331
5511548	WK300P XXL		5602482048348

WORK LINE

WORKING BIB-PANTS - GREY/ORANJE



BIB-PANTS for the most varied purposes, made with soft fabrics.
Protective clothing against minor hazards only.

- Zipper
- Elastic waist and suspenders
- Multiple pockets
- Left leg pocket with flap and velcro closure
- Two back pockets with flap and velcro closure.
- knee pads
- Washable
- Pre-shrunk

Fabric: 65% poliéster, 35% cotton

Code	Ref.		EAN
5511549	WK300BP M		5602482048355
5511550	WK300BP L		5602482048362
5511551	WK300BP XL		5602482048379
5511552	WK300BP XXL		5602482048386

WORKING OVERALL - GREY/ORANJE



Overalls for the most varied types of work, made with soft fabrics.
Protective clothing against minor hazards only.

- Zip closure with fabric protection and velcro closure
- Elastic waist
- Multiple pockets
- Left leg pocket with flap and velcro closure
- Two back pockets with flap and velcro closure.
- Reflective band on chest and legs.
- Washable
- Pre-shrunk

Fabric: 65% poliéster, 35% cotton

Code	Ref.		EAN
5511537	WK400 M		5602482048232
5511538	WK400 L		5602482048249
5511539	WK400 XL		5602482048256
5511540	WK400 XXL		5602482048263

WORK LINE

WORKING VEST - GREY/ORANJE



Practical and versatile vest made with soft fabrics. To be used in the most varied types of work.

Protective clothing against minor hazards only.

- Front zip
- Multiple pockets with zip and velcro.
- Washable
- Pre-shrunk

Fabric: 65% poliéster, 35% cotton

Code	Ref.		EAN
5511533	BW1100	M	5602482048195
5511534	BW1100	L	5602482048201
5511535	BW1100	XL	5602482048218
5511536	BW1100	XXL	5602482048225

HIGHT VISIBILITY VEST - YELLOW



High visibility vest.

Protective clothing against minor hazards only.

- Adjustable Velcro opening
- 2 horizontal reflective bands

Fabric: 100% poliéster

Code	Ref.		EAN
5511516	PL600	XL	5602482048027

HIGH VISIBILITY LINE

HV T-SHIRT - YELLOW



High visibility T-Shirt in yellow color.
Protective clothing against minor hazards only.

- Black perforated fabric under the arms for
- 2 horizontal and one vertical reflective bands

Fabric: 100% poliéster

Code	Ref.		EAN
5511558	EZ61	S	
5511559	EZ61	M	
5511560	EZ61	L	
5511561	EZ61	XL	
5511562	EZ61	2XL	
5511563	EZ61	3XL	

HV T-SHIRT - ORANGE



High visibility T-Shirt in orange color.
Protective clothing against minor hazards only.

- Black perforated fabric under the arms for
- 2 horizontal and one vertical reflective bands

Fabric: 100% poliéster

Code	Ref.		EAN
5511564	EZ61	S	
5511565	EZ61	M	
5511566	EZ61	L	
5511567	EZ61	XL	
5511568	EZ61	2XL	
5511569	EZ61	3XL	

HIGH VISIBILITY LINE

HV PANTS - YELLOW



- High visibility pants
Protective clothing against minor hazards only.
- Elastic waist
 - Button and zip
 - Rear zipped pocket
 - Side pockets with flap and velcro closure and reflective tapes
 - Washable
 - Pre-shrunk

CE marking
EN ISO 20471:2013+A1:2016

Fabric: 65% poliéster, 35% cotton

Code	Ref.		EAN
5511529	PT500 M		5602482048157
5511530	PT500 L		5602482048164
5511531	PT500 XL		5602482048171
5511532	PT500 XXL		5602482048188

HV RAINCOAT - YELLOW



- High visibility raincoat with PU coating.
Protective clothing against minor hazards only.
- Front zip, with protection and spring closure
 - Concealed hood in collar
 - Side pockets with flap and snap closure
 - Cuffs with springs
 - Waterproof
 - Breathable
 - Washable

CE marking
EN ISO 20471:2013+A1:2016
EN343:2003+A1:2007

Fabric: 100% PU

Code	Ref.		EAN
5511521	PY900 M		5602482048072
5511522	PY900 L		5602482048089
5511523	PY900 XL		5602482048096
5511524	PY900 XXL		5602482048102

HIGH VISIBILITY LINE

HV RAIN SUIT - YELLOW



- High visibility rain suit with PU coating.
Protective clothing against minor hazards only.
- Front zip with protection and spring closure
 - Concealed hood in collar
 - Jacket with reflective tapes, side pockets and cuffs with snaps
 - Pants with reflective tapes and adjustable leg snaps.
 - Waterproof
 - Breathable
 - Washable

CE marking
EN ISO 20471:2013+A1:2016
EN343:2003+A1:2007

Fabric: 100% PU

Code	Ref.		EAN
5511517	PY1000 M		5602482048034
5511518	PY1000 L		5602482048041
5511519	PY1000 XL		5602482048058
5511520	PY1000 XXL		5602482048065

HV PARKA - YELLOW



- High visibility parka.
Protective clothing against minor hazards only.
- Front zip with protection and spring closure
 - Concealed hood in collar
 - Elastic wrist
 - Side pockets with flaps and interior pocket with velcro closure
 - Waterproof • Breathable • Washable

CE marking
EN ISO 20471:2013+A1:2016
EN343:2003+A1:2007

Fabric: PU Oxford 300D
Lining: 100% nylon
Padding: 100% poliéster

Code	Ref.		EAN
5511525	NY700 M		5602482048119
5511526	NY700 L		5602482048126
5511527	NY700 XL		5602482048133
5511528	NY700 XXL		5602482048140

RAINCOAT (NYLON EXTRA)



Nylon raincoats with PVC induction, welded and watertight seams, waterproof and very resistant.
Attached hood, underarm vents, plastic wrists, zip and pockets.

Composition: 65% PVC /35% nylon
Length: 1,20 m

Code	Ref.			EAN
5501017	BLUE M	20		5602482025127
5501018	BLUE L	20		5602482013018
5501019	BLUE XL	20		5602482025134
5501020	BLUE XXL	20		5602482025141
5500806	GREEN M	20		5602482025158
5500807	GREEN L	20		5602482025165
5500808	GREEN XL	20		5602482025172
5500816	GREEN XXL	20		5602482025189

RAIN SUIT (NYLON EXTRA)



Nylon rain suits with PVC induction, welded and watertight seams, waterproof and very resistant.
Attached hood, underarm vents, plastic wrists, zip and pockets.

Composition: 65% PVC /35% nylon

Code	Ref.			EAN
5500670	BLUE M	20		5602482025196
5500671	BLUE L	 20		5602482013827
5500672	BLUE XL	20		5602482025202
5500673	BLUE XXL	20		5602482025219
5500805	GREEN M	20		5602482025226
5500809	GREEN L	20		5602482025233
5500810	GREEN XL	20		5602482025240
5500811	GREEN XXL	20		5602482025257

RAIN SUIT (PVC)



0,32 micron PVC rain suit. Waterproof and very resistant.
With an attached hood, vents, plastic wrists, zip and 2 pockets.

Composition: 78% PVC /22% polyester

Code	Ref.			EAN
5500678	YELLOW M	20		5602482012721
5500681	YELLOW XXL	20		5602482012745
5500682	GREEN M	20		5602482012950
5500683	GREEN L	20		5602482012943
5500684	GREEN XL	20		5602482012974
5500685	GREEN XXL	20		5602482013438

RAINCOAT (PU)



0,45 mm PU raincoats.
Attached hood, zip, welded seams, elastic wrists, spring pockets and back vents.

Composition: 20% PU, 50% PVC and 30% polyester
Length: 1,20 m

Code	Ref.			EAN
5511053	BLUE	M	20	5602482010533
5511054	BLUE	L	20	5602482044401
5511055	BLUE	XL	20	5602482044418
5511056	BLUE	XXL	20	5602482044425

RAIN SUIT (PU)



0,45 mm PU rain suits.
Attached hood, zip, welded seams, elastic wrists, spring pockets and back vents.

Composition: 20% PU, 50% PVC and 30% polyester

Code	Ref.			EAN
5510796	BLUE	M	20	5602482031029
5510797	BLUE	L	20	5602482031036
5510798	BLUE	XL	20	5602482031043
5510799	BLUE	XXL	20	5602482031050

S5**SAFETY WELLINGTON BOOTS - EN ISO 20345:2011 SRC**

MATERIAL



SOLE



TOECAP



INSOLE

STANDARD: EN ISO 20345:2011SRC

PVC construction wellingtons. Ideal for water-related work, as well as cement work, excavations and agricultural work.

- Anti-static and non-slip sole, resistant to oil, acid, petrol and grease.
- Stainless steel anti-perforation blade.
- Great flexibility, even at low temperatures.
- Nylon lining.
- Bootleg height: 38 cm.
- Protective steel toecap.
- Ankle protection.

Code	Ref.		EAN
5511515	No. 39 BLACK	6	
5511502	No. 40 BLACK	6	
5511503	No. 41 BLACK	6	
5511504	No. 42 BLACK	6	
5511505	No. 43 BLACK	6	
5511506	No. 44 BLACK	6	
5511507	No. 45 BLACK	6	

Code	Ref.		EAN
5511508	No. 39 GREEN	6	
5511509	No. 40 GREEN	6	
5511510	No. 41 GREEN	6	
5511511	No. 42 GREEN	6	
5511512	No. 43 GREEN	6	
5511513	No. 44 GREEN	6	
5511514	No. 45 GREEN	6	

WELLINGTON BOOTS (RUBBER)**STANDARD: EN ISO 20347:2012**

Black rubber Wellington boots to use in agriculture, construction, and other activities where protecting your feet from water is necessary. Nylon lined interior.

Code	Ref.		EAN
5510821	BLACK No. 36	8	5602482040205
5501048	BLACK No. 37	8	5602482022737
5501049	BLACK No. 38	8	5602482022744
5501040	BLACK No. 39	8	5602482022751
5501041	BLACK No. 40	8	5602482022058
5501042	BLACK No. 41	8	5602482022065
5501043	BLACK No. 42	8	5602482022072
5501044	BLACK No. 43	8	5602482022089
5501045	BLACK No. 44	8	5602482022812
5501046	BLACK No. 45	8	5602482010086
5501046	BLACK No. 46	8	5602482011304

FACE SHIELD VISOR

**Description du produit :**

Personal protective equipment consisting of 4 components, 0,5 mm PET visor, silicon comfort front support, adjustable silicone back support and ABS visor support. For face protection against solid and liquid particles and / or body fluids.

Dimensions:

Width: 174 mm

Height: 230 mm

Thickness: 0,5 mm

Weight: +/- 90 grams

Visor produced in accordance with Standard EN 166: 2001 and Directive 2001/95/EC

Code

Ref.



EAN

1108224

R5012

174 x 230 mm

FACE SHIELD VISOR

**Composition:**

Visor: PETG, anti-reflective, anti-fog effects on both sides.

Plastic band: Polypropylene.

Elastic fixing: Polyester and Polyamide.

Uses:

Designed for procedures and environments where there is a risk of splashes or splatters from blood and/or body fluids.

Dimensions:

Width: 300 mm

Height: 240 mm

Thickness: 0,5 mm

Code

Ref.



EAN

1501131

300 x 240 mm

70% ALCOHOL HAND SANITISER GEL



Hand sanitising gel.

Alcohol-based product, for hand disinfecting by rubbing and with no need to rinse. This product does not contain perfume or dyes and is therefore suitable for application in food processing or hospital areas.

HOW TO USE:

Apply a portion to the hands, massaging completely until dry, paying special attention to fingertips, nails and the space between the fingers. Massage for at least 30 seconds until complete evaporation of the product.

Code	Ref.		EAN
1501135	500 ml	15	5602482047716
1501134	5 litres	4	5602482047723

SURFACE SANITISER



The SADY sanitiser is a concentrated product (alcohol and quaternary ammonium-based) with triple action: bactericidal, virucidal and fungicidal.

HOW TO USE:

Apply the product straight (it is ready to use) on the area, surface or object to be disinfected. Suitable for all types of facilities where deep and continuous disinfection is required.

The SADY sanitiser has a shelf life of 2 years in an airtight container.

This sanitiser meets the requirements of Standards EN 1275 and EN 1276 within the scope of the HACCP system.

Code	Ref.		EAN
1501137	750 ml	12	5602482047730
1501136	5 litres	4	5602482047747

S3

S3 footwear rating:

A Antistatic - **E** Energy Absorption - **WRU** Water Resistance Upper - **P** Penetration Resistance**TORNADO SAFETY BOOTS - EN20345:2011 SRC**

- Material: Leather, waterproof.
- Anti-slip, anti-static PU sole, oil and acid resistant.
- Composite toecap.
- Anatomic and antistatic removable insole.

Code	Ref.			EAN
5511162	IT-110 No. 37		6	1560011013370
5511163	IT-110 No. 38		6	1560011013387
5511165	IT-110 No. 40		6	1560011013400
5511170	IT-110 No. 45		6	1560011013455
5511171	IT-110 No. 46		6	1560011013462

TORNADO SAFETY SHOES - EN20345:2011 SRC

- Material: Leather, waterproof.
- Anti-slip, anti-static PU sole, oil and acid resistant.
- Composite toecap.
- Anatomic and antistatic removable insole.

Code	Ref.			EAN
5511172	IT-120 No. 37		6	1560012013379
5511173	IT-120 No. 38		6	1560012013386
5511175	IT-120 No. 40		6	1560012013409
5511176	IT-120 No. 41		6	1560012013416
5511177	IT-120 No. 42		6	1560012013423
5511178	IT-120 No. 43		6	1560012013430
5511179	IT-120 No. 44		6	1560012013447
5511180	IT-120 No. 45		6	1560012013454
5511181	IT-120 No. 46		6	1560012013461

S3

S3 footwear rating:

A Antistatic - **E** Energy Absorption - **WRU** Water Resistance Upper - **P** Penetration Resistance

SAFETY SHOES - EN20345:2011



- Material: Leather.
- Anti-slip, anti-static PU sole, oil and acid resistant.
- Double seams for added strength.
- Composite toecap and insole.

Code	Ref.			EAN
5511040	K05K N° 38		10	5602482043473
5511041	K05K N° 39		10	5602482043480
5511042	K05K N° 40		10	5602482043497
5511043	K05K N° 41		10	5602482043503
5511046	K05K N° 44		10	5602482043534
5511047	K05K N° 45		10	5602482043541

S1-P

S1-P footwear rating:

A Antistatic - **P** Penetration Resistance

SAFETY BOOTS - EN345-1:2011

BOTAS DE PROTECCIÓN - EN345-1:2011



- Material: Leather
- Non-slip, antistatic, oil and acid resistant PU sole.
- Double stitching for greater resistance - Steel toe cap
- Steel insole

Code	Ref.			EAN
5501274	6138 N° 40		10	5602482026711
5501276	6138 N° 42		10	5602482026735
5501277	6138 N° 43		10	5602482026742
5501280	6138 N° 46		10	5602482026773

SAFETY SHOES - EN345-1:2011

ZAPATOS DE PROTECCIÓN - EN345-1:2011



- Material: Leather
- Non-slip, antistatic, oil and acid resistant PU sole.
- Double stitching for greater resistance - Steel toe cap
- Steel insole

Code	Ref.			EAN
5505040	4137 N° 40		10	5602482036987
5505041	4137 N° 41		10	5602482036994
5505043	4137 N° 43		10	5602482037014
5505045	4137 N° 45		10	5602482037038

PROTECTIVE MASKS FFP2 | KN95

**STANDARD: EN 149:2001+A1:2009**

• Half mask with five layers of filtration with two fixed elastic head straps, of the folding type. Designed to protect against solid and liquid particles suspended in the air.

Protection level indications:

• FFP2 NR: solid and liquid aerosols with low and medium toxicity (medium filtering efficiency).

***NR: Dust mask limited to one use per work shift**

Code	Ref.			EAN
5114790	JX-E95V	WITH VALVE	20	6923601112788
5114791	JX-E95		20	6923601110135

DISPOSABLE FACE MASKS

**STANDARD: EN 149:2001+A1:2009**

- Perfect fit.
- Non-woven.
- Breathable material.
- High filtering capacity.
- Multi-layer design.
- Adaptable and comfortable nose clip designed to provide an excellent breathing barrier.



Code	Ref.			EAN
5114789	FE3W	175 x 95 mm	50-2000	5602482048935

FORESTRY HELMET+ FACE SHIELD+EARMUFF



Ideal for working with cutting equipment such as chainsaws, hedge trimmers or loppers. Safely protects head, eyes and hearing.

Classification: EN 397+A1; EN352-3; EN 1731:01:2007

Category III

Features:

Mesh screen: 310x195mm

Weight: 700 gr.

SNR

23dB

Código	Ref.		EAN
5116072	DS5230	screen: 310x190mm	1-4 5602482052307

FACE SHIELD+EARMUFF



Ideal for working with cutting equipment such as chainsaws, hedge trimmers or loppers. Safely protects head, eyes and hearing.

Classification: EN352-1:2003; EN 173:2007

Category III

Features:

Mesh visor: 310x195mm

Weight: 700 gr.

SNR

23dB

Código	Ref.		EAN
5116073	DS5240	screen: 310x190mm	1-4 5602482052406

FACE SHIELD (STELL MESH)



This face mask is designed to provide effective protection against the risk of impact from high velocity particles such as those originating from forestry and gardening work.

Classification: : EN 2016/425; EN 166:2002

Class II

Characteristics:

Metal mesh visor: 400x195 mm

Weight: 240 gr.

Código	Ref.		EAN
5116074	DS5241	screen: 400x195mm	5602482052413

FACE SHIELD (PC)



Polycarbonate visor that offers effective protection against the risk of impact from medium velocity and medium energy particles.

Classification: : EN 2016/425; EN 166:2002

Class II

Features:

Polycarbonate visor: 395x200 mm

Weight: 280 gr.

Código	Ref.		EAN
5116083	DS5242	screen: 395x200mm	5602482052420

SAFETY GLASSES EXTENSIV | YELLOW

GAFAS PANORÁMICAS EXTENSIV | AMARILLO



Classification: EN166:2001; EN170:2002; EN172:1994+A2:2001
Lens marking: 2C-1,2 1 FT.

- Protective glasses for permanent use, with integral frame and extensible stem, yellow polycarbonate lens.
- Protects against impacts of medium energy.

Código	Ref.			EAN
5116081	DS5233	EPI de categoria II	12	5602482052338

SAFETY GLASSES EXTENSIV | GRY



Classification: EN166:2001; EN170:2002; EN172:1994+A2:2001
Lens marking: 2C-1,2 1 FT.

- Protective glasses for permanent use, with integral frame and extensible stem, yellow polycarbonate lens.
- Protects against impacts of medium energy.

Código	Ref.			EAN
5116080	DS5234	EPI de categoria II	12	5602482052345

SAFETY GLASSES EXTENSIV | TRANSPARENT



Classification: EN166:2001; EN170:2002; EN172:1994+A2:2001
Lens marking: 2C-1,2 1 FT.

- Protective glasses for permanent use, with integral frame and extensible stem, yellow polycarbonate lens.
- Protects against impacts of medium energy.

Código	Ref.			EAN
5116079	DS5236	EPI de categoria II	12	5602482052369

SAFETY GLASSES VENTIA | TRANSPARENT



Classification: EN166:2001; EN170:2002; EN172:1994+A2:2001
Lens marking: 2C-1,2 1 FT.

- Visor safety glasses (over-glasses) with polycarbonate lenses with UV protection. Can be worn over graduate glasses
- Protects against low energy impact.

Código	Ref.			EAN
5116082	DS5235	EPI de categoria II	12	5602482052352

SAFETY GLASSES | PANORA



Classification: EN166 F

- Goggles for protection against the risk of impact from high-velocity, low-energy particles and against splashes. It has a large visual field and can be used with graduate glasses.
- Injection-moulded flexible PVC

Código	Ref.			EAN
5116070	DS5231	optical class: 1	10	5602482052314

SAFETY GLASSES | PANORA



Classification: EN166 F

- Goggles for protection against the risk of impact from high-velocity, low-energy particles and against splashes. It has a large visual field and can be used with graduate glasses.
- Injection-moulded flexible PVC

Código	Ref.			EAN
5116071	DS5232	optical class: 1	10	5602482052321

FOAM EARPLUGS WITH CORD



Attenuation values

Frequency	Hz	125	250	500	1000	2000	4000	8000
Medium attenuation	dB	30.2	37.0	42.3	41.7	37.2	47.8	46.1
NORMAL Deviation	dB	6.7	4.9	7.1	7.1	5.8	6.3	5.9
Attenuation	dB	23.5	32.1	35.2	34.6	31.4	41.5	40.2
SNR=36dB H=34dB M=34dB L=31dB								

Classification: EN352-2:2002

Disposable hearing protectors made of PU foam.

Código	Ref.			EAN
5116075	DS5229	with cord	100	5602482052291

SNR
36dB

EARMUFFS | PV2



SNR
32dB

Height adjustment and hypoallergenic foam cups
Protection level:
H= 37 dB - M= 29 dB - L= 22 dB
Classification: EN 352-1:2002

Código	Ref.		EAN
5116077	DS5238	PV2 class 5	5602482052383

EARMUFFS | PV1



SNR
28dB

Height adjustment and hypoallergenic foam cups
Protection level:
H= 34 dB - M= 26 dB - L= 17 dB
Classification: EN 352-1:2002

Código	Ref.		EAN
5116076	DS5237	PV2 class 5	5602482052376

EARMUFFS | PV3



SNR
29dB

Height adjustment and hypoallergenic foam cups
Protection level:
H= 34 dB - M= 26 dB - L= 19 dB
Classification: EN 352-1:2002

Código	Ref.		EAN
5116078	DS5239	PV3 class 5	5602482052390



Diógenes & Santos, S.A.

**Rua Albino Moreira, 360
4485-767 Vilar VCD - PORTUGAL**

**Tel.: 226 076 310
email: geral@diosan.com**

www.sady.pt